



17" touchscreen featuring 10 touch points and PCAP technology

The ProLite T1721MSC-B2 17" touchscreen is based on projected capacitive technology, offering optimal seamless and accurate touch response. Due to its glass overlay, it guarantees high durability, scratch-resistance and perfect picture performance. A solid and steady base supports the touchscreen with an adjustable stand offering up to 80 degree tilt angles. Menu buttons are located on the back of the screen which can be locked to prevent tampering and include a handy function to deactivate the touchscreen for cleaning. The ProLite T1721MSC-B2 is an incredibly powerful touch solution, perfect for instore retail purposes.



Touch technology - Capacitive

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched. It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



Scratch resistance

Scratch resistance is a critical requirement for touch solutions deployed in commercial, educational, and industrial environments. A protective glass overlay covering the screen provides enhanced durability, ensuring reliable touch performance over time. The touch functionality remains fully operational and unaffected.

01 DISPLAY CHARACTERISTICS

Design	Edge to edge glass
Diagonal	17", 43cm
Panel	TN
Native resolution	1280 x 1024 @75Hz (1.3 megapixel)
Aspect ratio	5:4
Panel brightness	250 cd/m ²
Brightness	230 cd/m ² with touch
Static contrast	1000:1
Response time (BTB)	5ms
Viewing zone	horizontal/vertical: 170°/160°, right/left: 85°/85°, up/down: 80°/80°
Colour support	16.7mIn
Horizontal Sync	31.4 - 80kHz
Viewable area W x H	338 x 270.5mm, 13.3 x 10.6"
Pixel pitch	0.264mm
Bezel colour and finish	black, matte

02 TOUCH

Touch technology	projective capacitive
Touch points	10 (HID, only with supported OS)
Touch method	stylus, finger, glove (latex)
Touch interface	USB
Supported operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

03 INTERFACES / CONNECTORS / CONTROLS

Analog signal input	VGA x1
Digital signal input	HDMI x1
Audio input	Mini jack x1
Audio output	Speakers 2 x 2W
HDCP	yes
USB ports	x1

04 FEATURES

Glass thickness	1.5mm
Glass hardness	7H
Water and dust protection	IPX3 (front)
OSD key lock	yes

05 GENERAL

OSD languages	EN, DE, FR, ES, IT, CN, JP
Control buttons	Menu, Up/Left/ Auto adjustment button, Down/Right button, Return/Exit button, Power

User controls

picture (backlight, brightness, contrast, sharpness) display (auto adjustment, H position, V position, pixel clock, phase) colour (colour temp, picture mode) input, audio (volume, mute, audio source), other (reset, OSD time, OSD H position, OSD V position, language) information

Convenience	Kensington-lock™ prepared
-------------	---------------------------

Blue light reducer	yes
--------------------	-----

Plug&Play	DDC2B
-----------	-------

06 MECHANICAL

Tilt angle	70° up; 10° down
------------	------------------

VESA mounting	100 x 100mm
---------------	-------------

Cable management system	yes
-------------------------	-----

MTBF	50000 hours
------	-------------

07 ACCESSORIES INCLUDED

Cables	power (1.8m), USB (1.8m), HDMI (1.8m)
--------	---------------------------------------

Guides	quick start guide, safety guide
--------	---------------------------------

Other	AC adapter, mylar sheet (for VESA mount)
-------	--

Cable cover	yes
-------------	-----

08 POWER MANAGEMENT

Power supply unit	external
-------------------	----------

Power supply	DC 12 V
--------------	---------

Power usage	20W typical, 1.5W stand by, 0.3W off mode
-------------	---

09 SUSTAINABILITY

Regulations	CE, RoHS support, ErP, WEEE, cULus, REACH, UKCA
-------------	---

Energy efficiency class (Regulation (EU) 2017/1369)	E
---	---

REACH SVHC	above 0.1%: Lead, Diboron trioxide, Lead monoxide (lead oxide)
------------	--

10 DIMENSIONS / WEIGHT


Product dimensions W x H x D	392.5 x 364 x 198mm
------------------------------	---------------------

Box dimensions W x H x D	537 x 500 x 172mm
--------------------------	-------------------

Weight (without box)	4.4kg
----------------------	-------

Weight (with box)	5.8kg
-------------------	-------

EAN code	4948570120659
----------	---------------

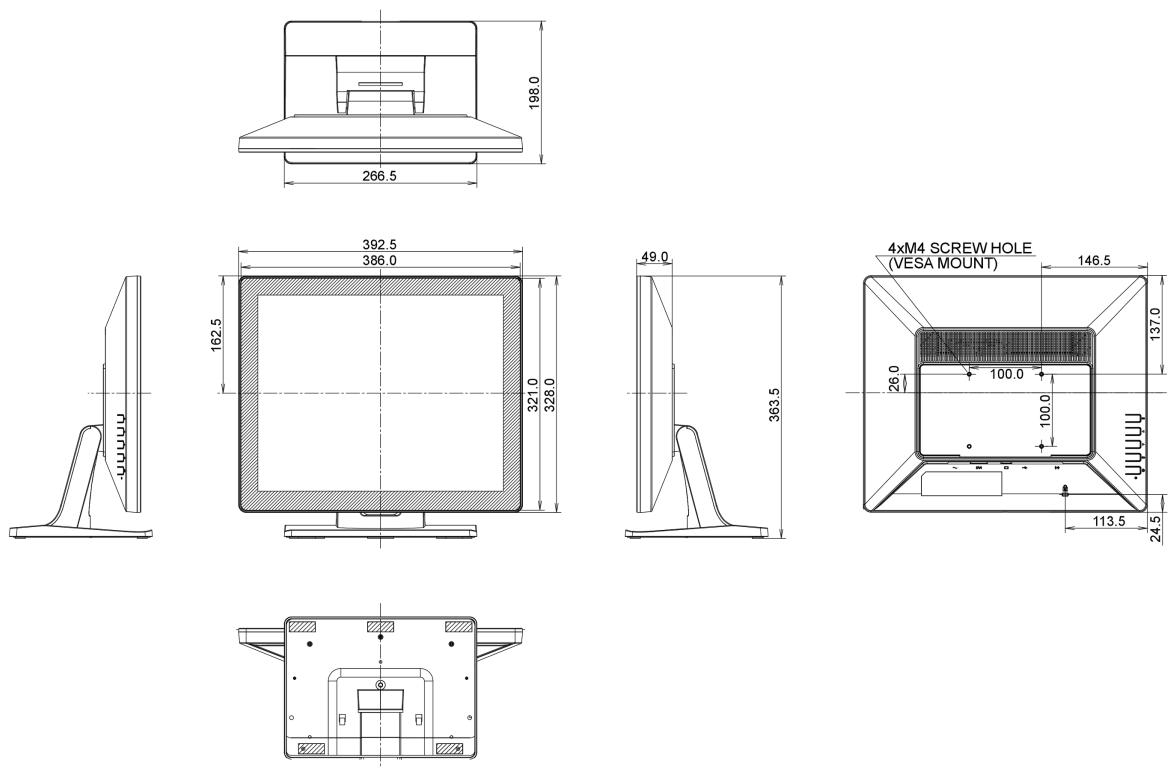

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED